



To find a dealer near you:
1-800-621-9419

Vent Sizes

VENT	EXTENDED		HOLE DIAMETER for 1001	HOLE DIAMETER for 431/556	APPLICATION
	FROM	TO			
S	3" (75mm)	4 1/2" (115mm)	3" (76mm)	3" (76mm)	Thin Walls Mobile Homes
A*	4 1/2" (115mm)	9 1/2" (240mm)	3" (76mm)	3" (76mm)	Wood Walls
B	9 1/2" (240mm)	15 3/4" (400mm)	3" (76mm)	3" (76mm)	Wood/Brick
C	15 3/4" (400mm)	23 5/8" (600mm)	3" (76mm)	3" (76mm)	Brick/Brick
D	23 5/8" (600mm)	31 1/2" (800mm)	3" (76mm)	3" (76mm)	Special

*Standard vent kit shipped with heater.

Accessories

Energysaver Series Extension Kits for 263, 431, and 556 models

- FOT-155 Extension (11.4"-20.3")
- FOT-156 Extension (21.0"-39.6")
- FOT-157 Extension (61.0"-79.6")
- FOT-158 Elbow + 1 pipe stopper "A"

Energysaver Series Extensions for 1004 models

- FOT-102 Extension (11.4"-20.3")
- FOT-103 Extension (21.0"-39.6")
- FOT-114 Extension (60.0"-80.0")
- FOT-115 Elbow 90°

Specifications

MODEL	CFMS	AMPERAGE	DECIBELS	BTU HIGH	BTU LOW	DIMENSIONS
RHFE 263 FA	128.5 High 96.4 Low	47 Watts High Fire	High=38dBA Low=31dBA	11,000 NG 11,000 LP	5,500 NG 5,700 LP	H 26 5/8 W 16 3/4 D 9 13/16
RHFE 431 FAIII & WTA	141.3 High 110.5 Low	40 Watts High Fire	High=38dBA Low=32dBA	16,700 NG 16,700 LP	8,200 NG 8,200 LP	H 21 13/16 W 29 1/2 D 9 13/16
RHFE 556 FAIII & WTA	162.7 High 110.5 Low	52 Watts WTA=55W	High=41dBA Low=32dBA	21,500 NG 20,700 LP	8,200 NG 8,200 LP	H 21 13/16 W 29 1/2 D 9 13/16
RHFE 1004 FA	360.6 High 203.4 Low	121 Watts High Fire	High=47dBA Low=37dBA	38,400 NG 36,500 LP	10,500 NG 10,500 LP	H 26 3/8 W 36 5/8 D 13

Rinnai is continually updating and improving products, therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation. See owners manual for complete specifications.



The evolution of heating technology
ENERGY SAVER



Please visit www.rinnai.com for more product information.

Features not found on any other heaters in North America.

Intelligent 7-stage Modulating Gas Valve and Blower

- Automatically adjusts the heat output and blower control, delivering a stable room temperature for maximum efficiency and comfort.
- Whisper quiet 7-stage fully modulating blower, no more going from on to off and hot and cold.

Advanced Safety Features:

- Child Safety Lock.
- Electronic Ignition—no pilot light.
- Venting Systems are wind tunnel tested.
- Clean filter indicator.
- Each heater passes a rigorous battery of tests before it leaves Rinnai.
- On board Self-Diagnostics for easier maintenance.

The Only "Cool-to-the-Touch Cabinet" In America.


Making it safe for any room.



RHFE-263FA



RHFE-1004FA

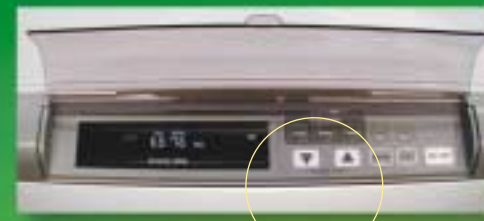

Programmable Thermostat and Frost Protection

- Only the RHFE-431WTA and RHFE-556WTA have a 7 Day/28 event programmable thermostat, which automatically heats during the times you program or can be operated manually.
- Frost Protection, allows the heater to set as low as 38 degrees to 55 degrees while you're away for extended periods.



Easy Installation

Every EnergySaver comes with our unique through-the-wall venting kit. Just drill a 3" hole and install Rinnai's stainless steel vent kit. (4.5" to 9.5" thickness) Optional kits are available for up to 31". It's that simple!

For hard to vent areas like basements and inside walls, Rinnai has extension kits which no other heater has.

Up to 84% Efficient Stainless Steel Heat Exchanger

- The EnergySaver's reputation lies in its ability to extract up to 84% AFUE efficiency through the use of a stainless steel heat exchanger, which adds many years of comfort. Just imagine, no heat loss from leaky ducts.

Integral Humidifier


- Adds humidity to your room for just the right comfort level.

Unbeatable Warranty:

- 10 year on the heat exchanger.
- 5 Year on the parts.
- 2 Year on labor.
- Additional three years labor warranty for only \$75.00.



RHFE-556FA
RHFE-431FA
RHFE-556WTA
RHFE-431WTA

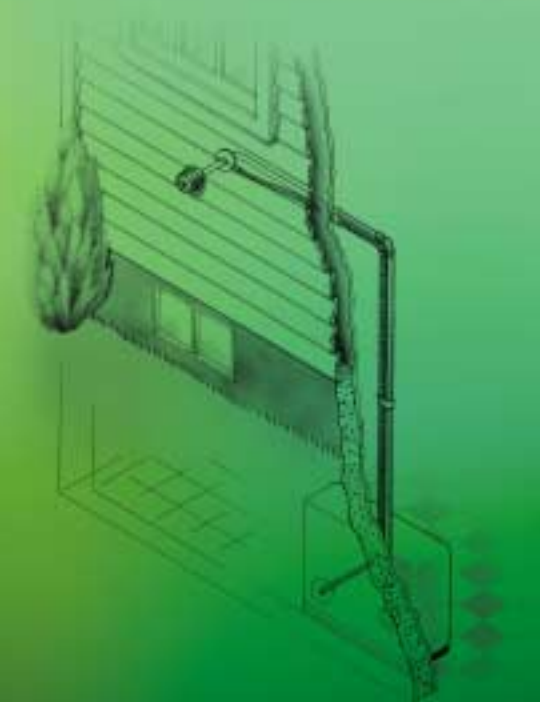

more
technology

more
efficiency

more
features